Refine Search

Search Results -

Terms	Documents
L28 and account$ near object	2

Database:
US Pre-Grant Publication Full-Text Database
US Patents Full-Text Database
US OCR Full-Text Database
EPO Abstracts Database
JPO Abstracts Database
Derwent World Patents Index
IBM Technical Disclosure Bulletins

Search:

[Refine Search]

[Recall Text]   [Clear]   [Interrupt]

Search History

DATE: Saturday, June 10, 2006   Printable Copy   Create Case

Set Name side by side	Query	Hit Count	Set Name result set
	DB=PGPB,USPT,USOC,EPAB,JPAB,DWPI,TDBD; PLUR=YES; OP=OR		
L29	L28 and account$ near object	2	L29
L28	L26 and data near packets	209	L28
L27	L26 data near packets	96564	L27
L26	L21 and charge near (tariff or fee or price)	1271	L26
L25	L24 and charge near (tariff or fee or price)	0	L25
L24	L23 and rout$ near messages	1275	L24
L23	L22 and data near packets	11823	L23
L22	l13 and L21	25730	L22
L21	communications near (network or internet or www)	223681	L21
L20	l1 and l13	5	L20
L19	370/389	9434	L19
L18	707/103r	1771	L18
L17	707.clas.	35180	L17

L16	705/1	5851	L16
L15	705/34	748	L15
L14	705.clas.	42362	L14
L13	370.clas.	98014	L13
L12	370/class	0	L12
L11	370/400	4268	L11
L10	370/238	1640	L10
L9	370/351	3955	L9
L8	L7 and (tariff or fee or price or charge)	1	L8
L7	l1 and account$ with object	9	L7
L6	('6996722')[URPN]	0	L6

DB=USPT; PLUR=YES; OP=OR

L5	(6580906 | 5787179 | 5937067 | 5710815 | 5584023 | 6351538 | 6055314 | 5544161 | 5148485 | 6222924 | 5467134 | 5483598 | 5652868 | 5301233)![PN]	14	L5

DB=PGPB,USPT,USOC,EPAB,JPAB,DWPI,TDBD; PLUR=YES; OP=OR

L4	('6996722')[ABPN1,NRPN,PN,TBAN,WKU]	2	L4
L3	L1 and (network or internet or www or web) near resources	13	L3
L2	L1 and usage near (network or internet or www or web) near resources	1	L2
L1	(federated near data near network or "federated data network" or federated adj data adj network or federated with data with network)	61	L1

END OF SEARCH HISTORY

Freeform Search

Database:
US Pre-Grant Publication Full-Text Database
US Patents Full-Text Database
US OCR Full-Text Database
EPO Abstracts Database
JPO Abstracts Database
Derwent World Patents Index
IBM Technical Disclosure Bulletins

Term:

Display: 10 Documents in **Display Format:** - Starting with Number 1

Generate: ○ **Hit List** ◉ **Hit Count** ○ **Side by Side** ○ **Image**

Search | Clear | Interrupt

Search History

DATE: Saturday, June 10, 2006   Printable Copy   Create Case

Set Name side by side	Query	Hit Count	Set Name result set
DB=PGPB,USPT,USOC,EPAB,JPAB,DWPI,TDBD; PLUR=YES; OP=OR			
L6	l1 and communications near network	344	L6
L5	('6055508')[URPN]	12	L5
DB=USPT; PLUR=YES; OP=OR			
L4	(5963914 | 5715164 | 5778066 | 5799083)![PN]	4	L4
DB=PGPB,USPT,USOC,EPAB,JPAB,DWPI,TDBD; PLUR=YES; OP=OR			
L3	('6055508')[ABPN1,NRPN,PN,TBAN,WKU]	2	L3
L2	"internet accounting"	48	L2
L1	(internet or network or www) near accounting	835	L1

END OF SEARCH HISTORY

☐   Generate Collection   Print

L2: Entry 28 of 48   File: USPT   Apr 25, 2000

US-PAT-NO: 6055508
DOCUMENT-IDENTIFIER: US 6055508 A

TITLE: Method for secure accounting and auditing on a communications network

DATE-ISSUED: April 25, 2000

INVENTOR-INFORMATION:

NAME	CITY	STATE	ZIP CODE	COUNTRY
Naor; Moni	Tel-Aviv			IL
Pinkas; Binyamin	Tel-Aviv			IL

ASSIGNEE-INFORMATION:

NAME	CITY	STATE	ZIP CODE	COUNTRY	TYPE CODE
Yeda Research and Development Co. Ltd.	Rehovot			IL	03

APPL-NO: 09/092069   [PALM]
DATE FILED: June 5, 1998

INT-CL-ISSUED: [07] G06 F 15/00, H04 L 9/00

US-CL-ISSUED: 705/11; 705/404, 705/405, 713/168
US-CL-CURRENT: 705/11; 705/404, 705/405, 713/168

FIELD-OF-CLASSIFICATION-SEARCH: 705/11, 705/404, 705/405, 713/168
See application file for complete search history.

PRIOR-ART-DISCLOSED:

U.S. PATENT DOCUMENTS

Search Selected   Search ALL   Clear

	PAT-NO	ISSUE-DATE	PATENTEE-NAME	US-CL
☐	5715164	February 1998	Liechti et al.	705/410
☐	5778066	July 1998	Shah et al.	705/62
☐	5799083	August 1998	Brothers et al.	380/239
☐	5963914	October 1999	Skinner et al.	705/11

OTHER PUBLICATIONS

Mogul, Jeffrey and Leach, Paul J.; "Simple Hit-Metering for HTTP, Preliminary
Draft", HTTP Working Group, pp. 1-30, Jan. 1997.

Shamir, U., "How to Share a Secret", Massachusetts Institute of Technology .
Rabin et al., "Verifiable Secret Sharing and Multiparty Protocols with Honest
Majority", Institute of Mathematics and Computer Science The Hebrew University of
Jerusalem, Israel, pp. 73-85, (1989).
Novak et al., "New Metrics for New Media: Towards the Development of Web
Measurement Standards", Vanderbilt University.
Naor et al., "Secure and Efficient Metering", Department of Applied Mathematics and
Computer Science Weizmann Institute of Science, Rehovot, Israel, Jun. 4, 1998.
Merkle, R., "A Certified Digital Signature", pp. 218-239, (1979).
Lesk, M., "Projections for Making Money on the Web", Harvard Infrastructure
Conference, (1997).
Jarecki S., "An Efficient Micropayment System Based on Probabilistic Polling",
(1997).
Franklin et al., "Auditable Metering with Lightweight Security", AT&T Labs, Feb.
1997.
Frankel et al., "Optimal-Resilience Proactive Public-Key Cryptosystems".
Feldman et al., "An Otimal Probabilistic Protocol for Synchrinous Byzantine
Agreement", Society for Industrial and Applied Mathematics, 26:873-933, (1997).
Feldman, "A Practical Scheme for Non-interactive Verifiable Secret Sharing",
Massachusetts Institute of Technology, pp. 427-437, (1987).
Fang, "Building an Accounting Infrastructure for the Internet", Princeton
University.
Dwork et al., "Pricing via Processing of Combatting Junk Mail", pp. 1-11.
Desmedt et al., "Threshold cryptosystems", EE & CS Department University of
Wisconsin-Milwaukee.
Coalition for Advertising Supported Information and Entertainment, "Interactive
Media Audience Measurements", (1997).
Carter et al., "Universal Classes of Hash Functions", Journal of Computer and
System Sciences, 18:143-155, (1979).

ART-UNIT: 277

PRIMARY-EXAMINER: Swann; Tod R.

ASSISTANT-EXAMINER: Myhre; James W.

ATTY-AGENT-FIRM: Browdy and Neimark

ABSTRACT:

A method for secure accounting and auditing of a communications network operates in
an environment in which many servers serve an even larger number of clients (e.g.
the web), and are required to meter the interaction between servers and clients
(e.g. counting the number of clients that were served by a server). The method
(metering process) is very efficient and does not require extensive usage of any
new communication channels. The metering is secure against fraud attempts by
servers which inflate the number of their clients and against clients that attempt
to disrupt the metering process. Several secure and efficient constructions of this
method are based on efficient cryptographic techniques, are also very accurate, and
preserver the privacy of the clients.

21 Claims, 3 Drawing figures

☐ ▓ Generate Collection ▓ ▓ Print ▓

L2: Entry 28 of 48   File: USPT   Apr 25, 2000

DOCUMENT-IDENTIFIER: US 6055508 A
TITLE: Method for secure accounting and auditing on a communications network

Brief Summary Text (16):
The Internet is based on packet switching, i.e. there is no dedicated path between
two parties that are communicating through the Internet, but rather each packet of
information is routed separately. The Internet is essentially a network of networks
and packets are typically routed through several different networks. These
properties complicate pricing and accounting mechanisms for Internet usage, and
indeed the most common pricing method is to charge a fixed price which is
independent of the actual number of packets which are transferred. Pricing theory
based analysis indicates that pricing Internet services according to the actual
usage (at least at times of network congestion) is superior in terms of network
efficiency. Usage based pricing has a disadvantage of incurring accounting and
billing costs. It is impractical to create detailed account reports (similar to
telephone accounts) due to the huge number of packets. Some are suggesting
measuring usage using sampling or only at times of congestion (however, even
producing reports for a sample of say, 1/1000 of the packets creates inconceivably
large reports). MacKie-Mason and Varian also expect breakthroughs in the area of
in-line distributed accounting that will lower the costs of Internet accounting.

☐ Generate Collection   Print

L6: Entry 304 of 344   File: USPT   Feb 11, 1997

US-PAT-NO: 5602907
DOCUMENT-IDENTIFIER: US 5602907 A

TITLE: Method and system for accounting communication charges

DATE-ISSUED: February 11, 1997

INVENTOR-INFORMATION:

NAME	CITY	STATE	ZIP CODE	COUNTRY
Hata; Emi	Kawasaki			JP
Nemoto; Kenji	Kawasaki			JP

ASSIGNEE-INFORMATION:

NAME	CITY	STATE	ZIP CODE	COUNTRY	TYPE CODE
Fujitsu Limited	Kanagawa			JP	03

APPL-NO: 08/284002   [PALM]
DATE FILED: August 1, 1994

FOREIGN-APPL-PRIORITY-DATA:

COUNTRY	APPL-NO	APPL-DATE
JP	6-005457	January 21, 1994

INT-CL-ISSUED: [06] H04 M 15/00

US-CL-ISSUED: 379/114; 379/112, 379/113, 379/115, 379/118, 379/130, 379/133, 379/136, 379/140
US-CL-CURRENT: 379/114.22; 379/114.01, 379/115.01, 379/118, 379/130, 379/133, 379/136, 379/140

FIELD-OF-CLASSIFICATION-SEARCH: 379/111-115, 379/118, 379/125-127, 379/130, 379/133, 379/140, 379/136
See application file for complete search history.

PRIOR-ART-DISCLOSED:

U.S. PATENT DOCUMENTS

Search Selected   Search ALL   Clear

	PAT-NO	ISSUE-DATE	PATENTEE-NAME	US-CL
☐	4788719	November 1988	Gupta	379/114
☐	4791640	December 1988	Sand	379/114

☐	4935956	June 1990	Hellwarth	379/112
☐	5146491	September 1992	Silver	379/114
☐	5218632	June 1993	Cool	379/112
☐	5222125	June 1993	Creswell	379/112
☐	5263084	November 1993	Chaput et al.	379/142
☐	5303297	April 1994	Hillis	379/114
☐	5381467	January 1985	Rosinski	379/114

ART-UNIT: 267

PRIMARY-EXAMINER: Chin; Wellington

ASSISTANT-EXAMINER: Shankar; Vijay

ABSTRACT:

During an execution of communications between an originating terminal and a
receiving terminal which are connected through an ISDN, when an item of information
saying that a rate at which charges for the communications are shared between these
terminals is changed to a given rate is transmitted from either the originating
terminal or the receiving terminal to the ISDN, the communication charges after
transmitting this item of information are imposed on the originating terminal
and/or the receiving terminal in accordance with this rate presented. If an
agreement of the other terminal is not obtained on this occasion, the charges are
imposed on the originating terminal and/or the receiving terminal in accordance
with an original accounting rate or the rate presented from the other terminal.

14 Claims, 33 Drawing figures

☐ [Generate Collection] [Print]

L6: Entry 304 of 344   File: USPT   Feb 11, 1997

DOCUMENT-IDENTIFIER: US 5602907 A
TITLE: Method and system for accounting communication charges

Brief Summary Text (3):
The present invention relates to an accounting method for sharing charges for
services of a communications network with an originating user and/or a receiving
user. The communications network to which the present invention is applied is a
communications network in which the service charges for the use thereof are imposed
and includes any kinds of communications networks such as an analog telephone
network-and a data communications network like a packet communications network and
an ISDN (Integrated Services Digital Network).

Brief Summary Text (5):
In recent years, there have been developed data communications services via a data
communications network such as a packet communications network and an ISDN. In such
data communications services, as in the same way with the communications services
via an analog telephone network, there is adopted a "connection-oriented"
communications system that a data path is preset before data communications take
place. FIG. 32 is a time arrow diagram showing a call setting sequence in this
conventional communications system. Note that the network is illustrated in the
form of one point in FIG. 32. As a matter of fact, however, this network is
constructed of a plurality of switches and trunk lines for relaying these switches
in all directions.

Brief Summary Text (7):
According to the accounting system of the charges (talk charges) for services of
the communications network in the above-mentioned "connection-oriented"
communications system, normally, the communications network service charges (talk
charges) are calculated based on a quantity of receiving cells on the receiving
user, and the charges are imposed on the originating user. Further, in the analog
telephone network, there is spread a "collect call service" in which the
communications network service charges (talk charges) are imposed on the receiving
user with an agreement between the originating and receiving users when setting the
call. Moreover, an accounting system wherein the charges are imposed on both of the
originating user and the receiving user in accordance with a fixed rate is proposed
(see Japanese Patent Laid-Open Publication No.61-146059).

Brief Summary Text (8):
By the way, for instance, if the originating and receiving users offer information
exhibiting high added values to each other, it is rational that the (originating
and receiving) users themselves flexibly determine a share of burden of the
communications network service charges in accordance with a high-and-low balance of
the added values of the information offered by each other.

Brief Summary Text (9):
In the conventional accounting system, however, the originating or receiving user
is able to only determine which user is burdened with the charges but can not
arbitrarily set a sharing rate thereof. Accordingly, the users do nothing but
accept the burden of irrational communications network service charges. Note that
there is caused such troublesomeness that the communications network service

charges have to be cleared off between the users in an ex-post-facto manner. This is a first problem inherent in the conventional accounting system.

Brief Summary Text (10):
Next, in the conventional accounting system, the accounting destination can be determined only when setting the call. Hence, even when there arises a necessity for changing accounting specification (an accounting destination and/or an accounting share) in the middle of the communications, the accounting specification have to be accepted as they are, or the call has to be reset on another occasion after temporarily releasing the call (disconnecting the line). This a second problem inherent in the conventional accounting system. Note that the second problem is conspicuous especially when executing a "call waiting function". More specifically, the call waiting function provided presently as a line switching added service of OSI protocol layer-3 is a function that an in-communications user holds an in-communications call and simultaneously reply to a new call-in when the user receives a call-in notice and, further, make switchable both of the in-communications call and an in-hold call. Then, according to the conventional accounting system, even when a call of the user whom the communication service charges are imposed on (normally, the originating user but the receiving user) when using the collect call services is held due to the call waiting function, the user has to accept the burden of the communications network service charges during the hold due to some convenience of the partner user. This is irrational. Even in this case, the accounting specification can be changed if the call is reset by releasing the call (disconnecting the line). If done so, however, there arises a contradiction that a significance of introducing the call waiting services disappears.

Brief Summary Text (13):
The accounting method and system according to the present invention has been devised under such circumstances. According to one aspect of the present invention, there is provided an accounting system of communication charges for communications between a first terminal and a second terminal connected to each other via a communications network. According to the accounting system, when changing information requesting that an accounting rate between the respective terminals with respect to the communication charges is changed to a given rate is transmitted from one terminal to the communications network in the middle of communications, the communication charges after transmitting the changing information are imposed on one terminal and/or the other terminal in accordance with the given rate.

Brief Summary Text (14):
The terminal includes a telephone, a facsimile, a computer, etc. Particularly when the communications network is a digital communications network, the terminal may be a digital telephone capable of transmitting even video information. Note that one of the first and second terminals is an originating terminal, while the other terminal is a receiving terminal. The originating terminal is a terminal making a call setting request, while the receiving terminal is a partner terminal receiving the call setting request.

Brief Summary Text (15):
The communication charges include line service charges, talk charges, added value service charges, etc.. Further, in connection with a method of calculating the talk charges, if a system for connecting the respective terminals is a constant connection system, the charges may be calculated based on a communications time. If the connection system of the respective terminals involves packet switching, a frame relay or a cell relay, the charges may be calculated based on the number of packets, frames or cells. The request for setting the accounting rate of the communication charges may be accepted when setting the call. That is, the rate of charges may be determined even at the start of communications. If not so, the charges are automatically imposed on the originating terminal and/or the receiving terminal in accordance with a predetermined rate when setting the call. All the

communication charges may be imposed on the originating terminal or on the receiving terminal as a variation in terms of the accounting rate. The communication charges may also be imposed on both of the originating terminal and the receiving terminal at a fixed rate. The changing information requesting the change of the accounting rate may be transmitted from either the originating terminal or the receiving terminal but may also be transmitted from only the originating terminal or the receiving terminal. Further, in the communications service added with the call waiting function, the request for holding the call can be conceived as a piece of information requesting the change of the accounting rate. In this case, all the charges can be always imposed on the terminal making the request for holding the call. When the changing information requesting the change of the accounting rate is transmitted from one terminal to the communications network, the charges may be imposed at all times in accordance with a rate contained in the changing information. Alternatively, after notifying the other terminal of the rate, and only when the other terminal agrees to this rate, the charges may also be imposed thereon in accordance with the rate. In the latter case, if the other terminal does not agree to the relevant rate, and when the other terminal transmits an item of information requesting a change to a different rate, the charges may be imposed based on the rate contained in the information transmitted by the other terminal. Note that this different rate is termed a modified rate.

Detailed Description Text (4):
FIG. 2 shows an outline of the accounting system in accordance with this embodiment carried out in the communications system having the above schematic construction. To be specific, a communication charge for the relevant call is imposed on the originating terminal T1 and/or receiving terminal T2 in accordance with a rate determined when setting the call by some means. In the middle of the communications by this call (step ST1), one terminal described above transmits, to the communications network, a piece of changing information requesting that an accounting rate of the communication charge between the respective terminals is changed to a given rate (step ST2). Then, the communications network imposes the communication charge after the above information has been transmitted upon one terminal and/or the other terminal in accordance with the given rate (step ST3).

Detailed Description Text (75):
If the accounting rate is not set (when the "ACCOUNTING DESIRED RATE" window 16 can not be opened), a call is set as it is between the originating terminal T1 and the receiving terminal T2. The talk between the two users takes place in accordance with a normal operation (step S13). In this case, charges for services of the communications network are all imposed on the originating user. Note that an interruption of processing of FIGS. 24 and 25 can be done for a duration of even the normal operation.

Detailed Description Text (78):
Namely, if the receiving user agrees to the sharing request, the receiving user inputs the function key "YES" 18 and raises the handset 14. Hereupon, the call is set between the originating terminal T1 and the receiving terminal T2, thus making the communications serviceable (step S07). The charges for services of the communications network in this instance are imposed at a rate desired by the originating user. Afterward, when the talk comes to an end (step S08), the accounting information is displayed on the display screens 13 of the originating terminal T1 and of the receiving terminal T2 as well (step S09). Then, this flow of procedures is finished.

Detailed Description Text (80):
Whereas if the receiving user talks in step S10, the receiving user inputs a self-desired accounting rate in the numeral input portion 19 of the "RECEIVED" window 16 and raises the handset 14 (step S11). Hereupon, the call is set between the originating terminal T1 and the receiving terminal T2, and the communications

become serviceable (step S07). The charges for services of the <u>communications network</u> in this instance are imposed at a rate desired by the receiving user. Note that 00% is set as an initial value in the numeral input portion 19 of this "RECEIVED" window 16. Accordingly, if the receiving user rejects the accounting share, the receiving user may raise the handset 14 without changing the setting of the numeral input portion 19 in step S11. The charges for services of the <u>communications network</u> in this case are all imposed on the originating user. When finishing the talk (step S08), the accounting information is displayed on the display screens of both of the originating and receiving terminals (step S09). Then, this procedure comes to an end.

<u>Detailed Description Text</u> (82):
Next, the procedures are made variable depending on whether or not this partner user agrees to the sharing request (step S18). Namely, if the partner user agrees to the sharing request, the partner user inputs the function key "YES" (step S19). Then, the next procedure proceeds to step S07. Charges for subsequent talks by using the <u>communications network</u> are to be imposed at a rate presented.

<u>Detailed Description Text</u> (83):
Contrastingly, if the partner user does not agree to the sharing request in step S18, the procedure is made variable depending on whether or not this partner user requests the change of the accounting rate (step S20). That is, if the partner user requests the change in the accounting rate, this partner user inputs a self-desired accounting rate (step S21)o Then, the next procedure proceeds to step S07. The charges for subsequent talks by using the <u>communications network</u> are to be imposed at the rate presented by the partner user.

<u>Detailed Description Text</u> (84):
Whereas if the partner user does not request the change in the accounting rate in step S20, this partner user does not input the function key 18 at all. Then, this interrupt processing of FIG. 24 comes to an end, and, thereafter, the procedure returns to the original processing position. In this case, the charges for services of the <u>communications network</u> are imposed the same as the accounting theretofore.

<u>Detailed Description Text</u> (88):
In any case, next, the talk between the originating terminal T1 and the receiving terminal T2 is held, and a call corresponding to a call setting message given from other user is set (step S26), The charges for services of the <u>communications network</u> during this hold are imposed on the receiving user when passing through step S25 but imposed the same as before when passing through step S28.

<u>Detailed Description Text</u> (90):
When the receiving user depresses the hook, the next procedure proceeds to step S07 of FIG. 23, and the talk becomes effective. The charges for services of the <u>communication network</u> in after are imposed the same as the one that is used before the holding.

CLAIMS:

1. An accounting method of communication charges for communications between a plurality of terminals connected to each other via a <u>communications network, the accounting</u> method comprising the steps of:

transmitting a first information indicating that an accounting sharing rate between respective terminals with respect to the communication charges is changed from a first sharing rate corresponding to an accounting sharing rate used for accounting the communication charges between the respective terminals prior to said transmitting step, to a second arbitrary sharing rate, from one terminal of said respective terminals to said <u>communications network,</u> at arbitrary timing in the middle of the communication;

detecting the transmission of the first information; and

imposing the communication charges for a communication after detecting the
transmission of the first information, on at least one of said one terminal and
another terminal of said respective terminals in accordance with the second sharing
rate.

2. An accounting method according to claim 1, further comprising the steps of:

transmitting the first information from said communications network to said another
terminal; and

imposing the communication charges after the first information has been transmitted
on at least one of said one terminal and said another terminal in accordance with
the second sharing rate only when a second information indicating an agreement on
the second rate is transmitted from said another terminal to said communications
network.

5. An accounting method of communication charges for communications between a
plurality of terminals connected to each other via a communications network, the
accounting method comprising the steps of:

detecting that information indicating a hold of a communication with a connection
through said communications network maintained, is transmitted from one of said
terminals to said communications network, in the middle of the communication; and

imposing all the communication charges after detecting the transmission of the
information on said one of said terminals.

6. An accounting method according to claim 5, wherein said communications network
holds the communications between a first terminal and a second terminal with a
connection of the first terminal and the second terminal maintained when a third
terminal makes a request for performing the communication with one of said first
and second terminals during an execution of the communications between said first
terminal and said second terminal, and, at the same time, said communications
network connects said one of said first and second terminals to said third terminal
and makes the communications between said connected terminals serviceable.

9. A communications system comprising:

a communications network; and

a terminal,

said terminal including:

(a) setting means for setting a sharing rate at which charges for communication
with other terminal are shared; and

(b) first transmitting means for transmitting a first information about a charge
sharing rate set by said setting means to said communications network at arbitrary
timing in the middle of the communications, said charge sharing rate being
arbitrary;

said communications network relaying the communication between said terminal and
said other terminal, imposing the charges for the communication between said
terminal and said other terminal on at least one of said terminal and said other
terminal and, upon receiving said first information about the charge sharing rate
from said terminal, imposing the charges for the communication on the basis of the

received charge sharing rate.

10. A communications system according to claim 9, wherein said communications network transmits, upon receiving the first information about the charge sharing rate from said terminal, the first information to said other terminal.

11. A communications system according to claim 10, wherein each said terminal includes:

displaying means for displaying, when the first information about the charge sharing rate transmitted from said communications network is received, the charge sharing rate;

inputting means for inputting a second information indicating whether there is an agreement on the charge sharing rate between said one and other terminals; and

second transmitting means for transmitting the second information inputted from said inputting means to said communications network, and

wherein said communications network imposes the communication charges on the basis of the charge sharing rate only when the second information transmitted from said terminal indicates an agreement on the charge sharing rate.

12. A communications system according to claim 11, wherein said communications network imposes, when said other terminal rejects an agreement on the charge sharing rate transmitted from said one terminal and when the charge sharing rate set by said other terminal is transmitted from said other terminal to the communications network, the charges on the basis of the charge sharing rate transmitted from said other terminal.

13. A terminal station, connected to a communications network and comprising:

(a) setting means for setting a sharing rate at which charges for communication of one terminal with another terminal are shared; and

(b) transmitting means for transmitting information about the charge sharing rate set by said setting means to said communications network at arbitrary timing in the middle of the communication;

said terminal station imposing charges for the communication on the basis of the charge sharing rate received by said communications network, on at least one of said one terminal and said another terminal, upon reception of said information about the charge sharing rate from said terminal station by the communications network, said charge sharing rate being arbitrary.

L6: Entry 301 of 344   File: USPT   Apr 21, 1998

US-PAT-NO: 5742668
DOCUMENT-IDENTIFIER: US 5742668 A
** See image for **Certificate of Correction** **

TITLE: Electronic massaging network

DATE-ISSUED: April 21, 1998

INVENTOR-INFORMATION:

NAME	CITY	STATE	ZIP CODE	COUNTRY
Pepe; David Matthew	Middletown	NJ		
Blitzer; Lisa B.	Manalapan	NJ		
Brockman; James Joseph	Perrineville	NJ		
Cruz; William	Eatontown	NJ		
Hakim; Dwight Omar	Matawan	NJ		
Kramer; Michael	Bronx County	NY		
Petr; Dawn Diane	Basking Ridge	NJ		
Ramaroson; Josefa	Freehold	NJ		
Ramirez; Gerardo	Bridgewater	NJ		
Wang; Yang-Wei	Howell	NJ		
White; Robert G.	Morristown	NJ		

ASSIGNEE-INFORMATION:

NAME	CITY	STATE	ZIP CODE	COUNTRY	TYPE CODE
Bell Communications Research, Inc.	Morristown	NJ			02

APPL-NO: 08/466623   [PALM]
DATE FILED: June 6, 1995

PARENT-CASE:
RELATED CASE INFORMATION This case is a continuation application of U.S. patent
application Ser. No. 08/309,336 filed on Sep. 19, 1994. The contents of that
application are incorporated herein by reference.

INT-CL-ISSUED: [06] H04 M 11/00, H04 M 1/64

US-CL-ISSUED: 379/58; 379/67, 379/57
US-CL-CURRENT: 455/415; 379/88.22, 379/93.03, 379/93.23, 455/413

FIELD-OF-CLASSIFICATION-SEARCH: 379/58, 379/59, 379/60, 379/57, 379/93, 379/67,
370/58.1, 370/110.1
See application file for complete search history.

PRIOR-ART-DISCLOSED:

U.S. PATENT DOCUMENTS

| | Search Selected | Search ALL | Clear |

	PAT-NO	ISSUE-DATE	PATENTEE-NAME	US-CL
☐	5008926	April 1991	Misholi	379/89
☐	5168271	December 1992	Hoff	379/60 X
☐	5311576	May 1994	Brunson et al.	379/89
☐	5325419	June 1994	Connolly et al.	379/60
☐	5329579	July 1994	Brunson	379/88
☐	5351235	September 1994	Lahtinen	370/58.1
☐	5384831	January 1995	Cresswell	379/67
☐	5418835	May 1995	Frohman et al.	379/57
☐	5420911	May 1995	Dahlin et al.	379/59
☐	5452289	September 1995	Sharma et al.	370/32.1
☐	5479411	December 1995	Klein	370/110.1
☐	5604788	February 1997	Tett	379/58

ART-UNIT: 268

PRIMARY-EXAMINER: Bost; Dwayne

ASSISTANT-EXAMINER: Richardson; Scott

ATTY-AGENT-FIRM: Yeadon; Loria B. Giordano; Joseph

ABSTRACT:

A personal communications internetwork provides a personal communications internetwork providing a network subscriber with the ability to remotely control the receipt and delivery of wireless and wireline electronic text messages. The network operates as an interface between wireless and wireline networks. The subscriber's message receipt and delivery options are maintained in a database which the subscriber may access by wireless or wireline communications to update the options programmed in the database.

3 Claims, 32 Drawing figures

☐ [Generate Collection] [Print]

L6: Entry 301 of 344   File: USPT   Apr 21, 1998

DOCUMENT-IDENTIFIER: US 5742668 A
** See image for Certificate of Correction **
TITLE: Electronic massaging network

Brief Summary Text (5):
The messaging options described above are available to businesses of all sizes, as
well as individual users, from a variety of service providers. Many offices have
some or all of the messaging options described above. The office may have certain
messaging equipment (referred to as "consumer premises equipment" or "CPE")
connected to one or more wireline networks. That is, the office may have
telephones, fax servers, and voice mail systems connected to phone lines, and
computers having modems for e-mail connected to packet networks which are connected
via phone lines. The mobile employee may have certain wireless messaging equipment,
such as a pager, a cellular telephone, or a personal digital assistant ("PDA"),
which is typically a notebook computer connected to a wireless communication
network.

Detailed Description Text (25):
A mobile communications subscriber (for example an employee who works at the office
described above and travels frequently) has various portable messaging equipment,
such as a PDA 30, a cellular phone 32, and a pager 34. These are connected to
wireless networks 39. These wireless messaging options may be provided by different
service providers. That is, the cellular phone may be connected to a wireless
network of a cellular phone service provider, the pager may be connected to a
different wireless network maintained by a pager service provider, and the PDA may
be connected to a third wireless communications network maintained by yet another
service provider.

Detailed Description Text (115):
Communication between the PDA and PCI use, for example, an X.25 transport using the
UDP IP protocol. A brief discussion of the PDA structure is provided. The PDA 30 is
preferably a notebook or palm top computer having a wireless network interface. The
PDA may be, for example a Hewlett Packard Omnibook 300 notebook computer running a
PCI application. FIG. 11 illustrates an exemplary PDA. The PDA 30 has a central
processing unit 295 connected to a bus B. The central processing unit ("CPU") 295
performs most of the computing and logic functions of the PDA 30. A memory 296 is
connected to the bus B, which stores information to be provided to the CPU 295 or
otherwise used by the PDA 30. An input/output device 297, such as a keyboard, is
also connected to the bus B which allows a user to input data for storage in memory
296 or for use by CPU 295. A display 298 is connected to the bus B. The PDA 30 also
has a wireless communication interface 299 for communication with a wireless
communication network.

Detailed Description Text (192):
Billing operations is supported by an Automatic Message Accounting Network
Function. The automatic network accounting measures, collects, formats and outputs
network usage information to upstream billing and other operation application and
service purposes. Preferably, automatic message accounting data is collected at
various stages of service flows across network equipment and services.

  L6: Entry 286 of 344   File: USPT   Oct 26, 1999

US-PAT-NO: 5974457
DOCUMENT-IDENTIFIER: US 5974457 A

TITLE: Intelligent realtime monitoring of data traffic

DATE-ISSUED: October 26, 1999

INVENTOR-INFORMATION:

NAME	CITY	STATE	ZIP CODE	COUNTRY
Waclawsky; John G.	Frederick	MD		
Hershey; Paul C.	Manassas	VA		
Daugherty; Raymond F.	Mt. Airy	MD		

ASSIGNEE-INFORMATION:

NAME	CITY	STATE	ZIP CODE	COUNTRY	TYPE CODE
International Business Machines Corporation	Armonk	NY			02

APPL-NO: 08/172701   [PALM]
DATE FILED: December 23, 1993

INT-CL-ISSUED: [06] G06 F 17/40

US-CL-ISSUED: 709/224; 706/917, 706/46
US-CL-CURRENT: 709/224; 706/46, 706/917

FIELD-OF-CLASSIFICATION-SEARCH: 364/550, 364/551.01, 364/579, 364/580, 364/489,
364/490, 364/514C, 364/514R, 371/27, 395/21, 395/51, 395/917
See application file for complete search history.

PRIOR-ART-DISCLOSED:

U.S. PATENT DOCUMENTS

Search Selected   Search ALL   Clear

	PAT-NO	ISSUE-DATE	PATENTEE-NAME	US-CL
☐	4227245	October 1980	Edbland et al.	
☐	4458309	July 1984	Wilder, Jr.	
☐	4459656	July 1984	Wilder, Jr.	
☐	4521849	June 1985	Wilder, Jr.	
☐	4779194	October 1988	Jennings et al.	

☐	4805089	February 1989	Lane et al.	
☐	4821178	April 1989	Levin et al.	364/514
☐	4851998	July 1989	Hospodor	
☐	4905171	February 1990	Kiel et al.	
☐	4939724	July 1990	Ebersole	
☐	4944038	July 1990	Hardy et al.	
☐	4980824	December 1990	Tulpule et al.	
☐	5035302	July 1991	Thangavelu	
☐	5062055	October 1991	Chinnaswamy et al.	
☐	5067107	November 1991	Wade	
☐	5072376	December 1991	Ellsworth	
☐	5077763	December 1991	Gagnoud et al.	
☐	5079760	January 1992	Nemirovsky et al.	
☐	5084871	January 1992	Carn et al.	
☐	5243543	September 1993	Notess	364/514
☐	5375070	December 1994	Hershey et al.	364/550

FOREIGN PATENT DOCUMENTS

FOREIGN-PAT-NO	PUBN-DATE	COUNTRY	CLASS
61-53855	March 1986	JP	

ART-UNIT: 244

PRIMARY-EXAMINER: Voeltz; Emanuel T.

ASSISTANT-EXAMINER: Choi; Kyle J.

ATTY-AGENT-FIRM: Hoel; John E. Flynn; John D.

ABSTRACT:

The invention features a system and method to enable real-time establishment and
maintenance of a standard of operation for a data communications network. The
standard is a data set which includes network activity which is historically
categorized by traffic type and by activity. The process begins with monitoring the
network media or some network component over some period of time. The monitoring
information is used to build benchmark data sets. The benchmark data sets contain a
standard of operation for the network, which are historically categorized by either
traffic type or activity. This standard of operation is constantly built by the
intelligent monitoring facilities. After some period of time which is referred to
as the benchmark data set refresh interval, the benchmark that was created is
employed in a fashion to allow a determination as to whether the data that is taken
from the current monitoring activity indicates normal network behavior. If the
current network operating characteristics are outside the bounds or normal
behavior, then alerts and logs of information can be sent to the expert system. The

expert system can then effect some network control. In this manner, auto benchmarking is accomplished with self customization.

18 Claims, 24 Drawing figures

◻ [Generate Collection] [Print]

L6: Entry 286 of 344   File: USPT   Oct 26, 1999

DOCUMENT-IDENTIFIER: US 5974457 A
TITLE: Intelligent realtime monitoring of data traffic

Abstract Text (1):
The invention features a system and method to enable real-time establishment and
maintenance of a standard of operation for a data communications network. The
standard is a data set which includes network activity which is historically
categorized by traffic type and by activity. The process begins with monitoring the
network media or some network component over some period of time. The monitoring
information is used to build benchmark data sets. The benchmark data sets contain a
standard of operation for the network, which are historically categorized by either
traffic type or activity. This standard of operation is constantly built by the
intelligent monitoring facilities. After some period of time which is referred to
as the benchmark data set refresh interval, the benchmark that was created is
employed in a fashion to allow a determination as to whether the data that is taken
from the current monitoring activity indicates normal network behavior. If the
current network operating characteristics are outside the bounds or normal
behavior, then alerts and logs of information can be sent to the expert system. The
expert system can then effect some network control. In this manner, auto
benchmarking is accomplished with self customization.

Brief Summary Text (6):
This invention is related to the copending U.S. patent application Ser. No.
08/024,542, now U.S. Pat. No. 5,365,514 filed May 1, 1993 by J. G. Waclawsky, et
al., entitled "System and Method for Configuring an Event Driven Interface and
Analyzing Its Output for Monitoring and Controlling a Data Communications Network,"
assigned to the IBM Corporation and incorporated herein by reference. The
Waclawsky, et al. patent application describes an information collection
architecture which allows the conversion of signals in a data communications
network bit stream, to be fed back into a monitoring and controlling system to
assess and to modify protocol activity for a variety of communications protocols.
The protocols handled include Token Ring protocol, ETHERNET protocol, Fiber
Distributed Data Interface (FDDI) protocol, System Network Architecture (SNA)
protocols, TCP/IP protocols, and SONET protocol, among others.

Brief Summary Text (7):
An example of this is for a token ring performance architecture described in
greater detail in copending U.S. patent application Ser. No. 08/024,575, now U.S.
Pat. No. 5,375,070 filed Mar. 1, 1993 by P. C. Hershey, et al. entitled "Event
Driven Interface for a System for Monitoring and Controlling a Data Communications
Network," assigned to IBM Corporation and incorporated herein by reference. This
reference describes an expert system driven implementation that constructs a
control vector C(i) which is transmitted to a programmable performance vector
generator which includes an Event Driven Interface (EDI). The control vector tells
the EDI how to organize its logic trees based on the type of protocol being run on
a network. The control vector will configure the EDI logic trees to perform digital
filtering of binary bit sequences on the network which characterize the protocol,
the performance, and from which problem determination information can be inferred.
The expert system will specify a format for an event vector E(i) that will be
generated by the Event Driven Interface within the Programmable Performance Vector

Generator (PPVG), that will provide the requested information characterizing the current condition of the network. The expert system then analyzes the information in the event vector and drives control functions which enable control signals to be issued to the network to modify network load, perform load balancing and load distribution, do problem determination, modify network routing, or to provide other customer services. The expert system can issue control vectors C(i) to collect additional information to perform problem determination and analysis to identify and analyze temporary failures and performance degradation on the network. The expert system can perform performance monitoring to identify when a performance factor of a network component exceeds a predefined threshold. The expert system can perform benchmark testing of an application running on the network with respect to its functions, reliability and performance objectives. The expert system can initiate performance tuning and optimization of the network to improve the efficiency of the network or other network components. The expert system can perform a workload analysis and prepare a report to identify both application and protocol-related workloads, i.e., how much network traffic is useful information and how much is protocol-related, where the noisiest nodes are in the network and the amount of incoming and outgoing traffic flow to the network. The expert system can provide network sizing information to guarantee a workable solution for a particular customer application, based upon forecast traffic patterns. The expert system can provide input information for load balancing, load distribution and network control. The principle of operation of the expert system and Programmable Performance Vector Generator combination is also applied, to additional communications protocols such as Ethernet protocol, FDDI protocol, SNA protocols, TCP/IP protocols or the SONET protocol.

Brief Summary Text (8):
The invention finds application within the Information Collection Architecture which is further described in the above referenced Waclawsky, et al. patent application. The Information Collection Architecture extracts information characterizing all data communications network environments, especially those that are high speed and/or complex network environments. The Information Collection Architecture is an enabler that provides a unique physical layer based window into both physical and logical network activity. It can significantly improve the functions, and services and management of any data communications network. It is independent of communications protocols, standards, and physical media. The Information Collection Architecture invention is physically connected to an existing data communications network to monitor the high speed messages which are transferred over the network. The Information Collection Architecture includes a feedback connection which can be used to provide control signals back to the data communications network to modify the behavior of the network in response to monitoring data messages on the network. The Information Collection Architecture performs the functions of real-time identification of events which occur on the network and prepares summaries of correlated event behavior from the network. The Information Collection Architecture provides correlated data and does not go through any data decompression or reconstruction process. This differs from prior techniques of data compression and sampling. The Information Collection Architecture invention performs an examination of only the frequency of occurrence of selected bit patterns, unlike prior trace techniques which require processing for the examination of all network data to determine performance metrics. The Information Collection Architecture permits all traffic to be monitored so that no information goes unseen, which is distinct from prior filtering techniques which permit only a portion of the network traffic to reach the network monitor for analysis. The Information Collection Architecture includes an organized collection of hybrid data reduction vectors and their associated services. These services include performance monitoring, performance tuning and optimization, benchmarking, problem determination, workload analysis and reporting, network sizing, load balancing, load distribution, network control, network accounting and network management functions. These services are provided for a large variety of data communications networks.

Brief Summary Text (9):
It would be useful to provide a means for establishing benchmarks for the behavior
of data communications networks so that valid criteria can be made available to the
expert system of the Information Collection Architecture to enable the monitoring
and controlling of the data communications network based upon relevant standards of
behavior for the network.

Brief Summary Text (11):
It is an object of this invention to provide a technique for realtime monitoring of
data communication networks.

Brief Summary Text (12):
It is still another object of the invention to provide an improved technique for
the display of the results of realtime monitoring of a data communication network.

Brief Summary Text (14):
These and other objects, features and advantages are accomplished by the invention.
The invention uses the Event Driven Interface described in the above cited Hershey,
et al. patent application to deliver event vectors to the realtime intelligent
monitoring system for monitoring the behavior of a data communications network to
which it is coupled. The intelligent realtime monitoring system removes the need
for process and storage at the data collection point. An event vector is
accumulated at the data collection point and is transmitted over communications
link to the intelligent realtime monitoring system where it is processed and
displayed for analysis and network control. The resulting realtime monitoring
invention enables the expert system to respond in realtime to deviations in the
behavior of the data communications network from norms established by benchmark
data sets. It also enables the system administrator to perform realtime monitoring
and reacting in response to events which are displayed representing events
occurring on a data communications network.

Detailed Description Text (2):
The invention is a method and system to enable realtime establishment and
maintenance of a standard of operation for a data communications network. The
standard is a data set which includes network activity which is historically
categorized by traffic type and by activity.

Detailed Description Text (3):
FIGS. 1A and 1B describe the overall functional organization of the invention, FIG.
1A concentrates on the automated benchmarking with a self-customization feature and
FIG. 1B focuses on the Intelligent Realtime Monitor feature. In FIG. 1A it is seen
that the Event Driven Interface of the information collection architecture monitor
100 which is connected to the communications network being monitored, accepts event
vectors which are transferred to the buffer array 140. Reference to Table 1 will
illustrate example event vectors such as those which are generated by the Event
Driven Interface described in the copending U.S. patent application Ser. No.
08/024,575, now U.S. Pat. No. 5,375,070 filed Mar. 1, 1993, which is cited above.
The event vectors shown in Table 1 characterized batch traffic which starts and
stops using the size and the frame rates and queuing status using the maximum
frames per rotation (MFR) column. It can be seen in Table 1 that at line A, the
number of frames is 682 and the maximum frame size is 103 bytes whereas at line B
which is many minutes later in time, shows the number of frames being over 6000 and
the maximum frame size being over 1000 bytes. Line B is near the middle of a burst
of batch traffic that has been detected in the network. This is just one of many
examples of the kind of information which is provided by the event vectors which
are input to the buffer array 140. The buffer array 140 then outputs information
derived from the event vectors to the accumulator storage 230 in the customized
benchmark manager 195. The information from the event vectors is also output from
the buffer array 140 to the expert system analysis module 160. The output from the

buffer array 140 is also applied to the Intelligent Realtime Monitor 199 shown in FIG. 1B.

Detailed Description Text (17):
FIG. 2 illustrates building an example benchmark data set structure, in accordance with the invention. The benchmark data set structure (BDS) 110 shown in FIG. 2 is an example which covers a duration I2 of one week, from midnight Sunday morning until the following midnight Sunday morning. The benchmark data set 110 includes consecutive one hour sample segments which are referred to as the benchmark interval information, which are taken over the interval I3, which in this example is one hour in duration. During each one hour interval, data has been collected from the event vectors generated by the Event Driven Interface in the data communications network. The data from the event vectors is characterized as A1, A2, A3 . . . in FIG. 2. An example of the type of information which can be accumulated during the one hour interval, is A1 can be the percent utilization which can be characterized as the maximum percent, minimum percent and average percent utilization which has been observed during the one hour interval Tuesday at 9:00 a.m. This information is collected in realtime by the Event Driven Interface and output as an event vector E(i) which is supplied by the monitor 100 shown in FIG. 2. As the information for the one hour segment is accumulated, it can fill a buffer 230 which is set up for the accumulation of information to be placed in the benchmark data set 110 by the customizing benchmark manager shown as 195 in FIG. 8 and FIGS. 1A and 1B. Other categories of information can include priority values observed for messages on the network and this is characterized in FIG. 2. Still other categories can be, for example, the number of bytes of information observed for particular applications having packets communicated on the network during the hour interval, and this would be accumulated in another category such as A17. Information which is accumulated in realtime will be incorporated into the appropriate benchmark data set that is also being buffered for future use. The benchmark data set in this example would have its component data accumulated for consecutive one hour benchmark collection intervals for an entire week I2. The completed buffered information in the benchmark data set for a week can then be set aside until a future time I1 at which it will be invoked as the set of benchmark standards for use as benchmark 120 in FIGS. 1A and 1B.

Detailed Description Text (19):
FIG. 2 shows how the monitor 100 can be applied in this example to take 30 second samplings of duration I5 of event vectors E(i) from the Event Driven Interface which is monitoring the data communications network in realtime. Each consecutive 60 second sampling interval I4 can be stored as is shown in FIG. 2 so that a total of 60 consecutive one minute sampling intervals are stored and the monitoring will progress as is shown in FIG. 2 for a duration of one hour.

Detailed Description Text (22):
In this example of the invention, the first BDS 120 can represent normal data network operations, the second BDS 120' can represent other BDS categories which can include batch traffic, interactive traffic, voice traffic, video traffic, accounting information, packet sizes, etc. In accordance with the invention, as the realtime event vectors E(i) are applied from the Event Driven Interface to the register 140 in FIG. 3, they are consecutively compared with the corresponding time interval segment 210 for BDS 120 in the first criteria module 150. From this comparison an inference can be drawn as to whether the data communications network is operating within the limits characterized by the segment 210 in the BDS 120 or whether it is outside those limits. The expert system 160 will perform this analysis and will issue an alert 180 which can result in network control 170 issuing control signals to the network to modify its operating parameters where necessary, in order to maintain a desired network throughput. Alternately, if the expert system 160, using the first criteria module 150, determines that the character of the traffic currently on the network is qualitatively different from the kind of traffic characterized by the BDS 120, then the expert system 160, in

accordance with the invention, can apply a different criteria module, such as the module 150'. For example, if the expert system 160, in analyzing the event vectors in 140, determines that instead of having a normal mixture of traffic on the network for the current one hour segment, there is instead a large volume of low priority traffic, then an inference can be drawn that the network is communicating batch mode traffic. Then in accordance with the invention, the expert system 160 can switch to the second BDS (BDS2) 120' and use the second criteria module 150', which in this example, characterize batch mode traffic. Then by using the second BDS 120' and the second criteria module 150', the system can measure whether the network is exceeding the operating limits established by the benchmark collection interval 210' for the second BDS2 120'.

Detailed Description Text (24):
In this manner, great flexibility is provided in the application of benchmark information to the monitoring analysis and network control of a data communications network which has been previously characterized by the accumulation of benchmark data from past event vectors generated by the Event Driven Interfaces in the data communications network.

CLAIMS:

1. In a system for intelligent real time monitoring of a data communications network which communicates using a serial stream of binary bits having characteristic patterns, a method for outputting monitoring and controlling signals which are customized by classes of traffic on the network, comprising:

inputting one or more event vectors from an Event Driven Interface coupled to a data communications network;

storing a first criteria of rules in said system for a first class of traffic in said network with a standard for said first class of traffic in said network;

storing in said system a first benchmark data set as said standard for said first class of traffic, said first benchmark data set being derived from previously monitored events of said first class of traffic in said network;

accessing said first criteria of rules and comparing information derived from said inputted event vectors with said standard for said first class of traffic, using said first criteria of rules;

outputting an inference signal in response said comparison to manage and control said first class of traffic on said network;

displaying a graphical representation of the behavior of the first class traffic using the inference signal for said first class of traffic.

11. A system for intelligent real-time monitoring using an event driven interface for analyzing the output of a data communications network which communicates using a serial stream of binary bits having characteristic patterns, comprising:

an event vector register coupled to the event driven interface, for receiving event vectors that characterize the behavior of the data communications network, each event vector descriptive of one or more classes of traffic occurring on the data communications network;

an expert system, having an input coupled to said event vector register, for receiving information from said event vectors, said expert system having one or more criteria modules, each criteria module associated with a class of traffic and a standard for said associated class of traffic, each criteria module having rules for characterizing the traffic on the network by comparing information represented

by the event vectors with a standard of behavior associated with the class of
traffic associated with the criteria module;

said expert system outputting one or more inference signals, each inference signal
associated with a class of traffic on the network; and

an intelligent real-time monitor that outputs signals to said data communications
network in response to said inference signals to mange and control said classes of
traffic in said data communications network and displaying a specific graphical
representation of each inference signal based upon the associated class of traffic.

☐ Generate Collection   Print

L3: Entry 13 of 13   File: USPT   Feb 7, 2006

US-PAT-NO: 6996722
DOCUMENT-IDENTIFIER: US 6996722 B1

TITLE: Data communications

DATE-ISSUED: February 7, 2006

INVENTOR-INFORMATION:

NAME	CITY	STATE	ZIP CODE	COUNTRY
Fairman; Ian R	Ipswich			GB
Briscoe; Robert J	Woodbridge			GB

ASSIGNEE-INFORMATION:

NAME	CITY	STATE	ZIP CODE	COUNTRY	TYPE CODE
British Telecommunications public limited company	London			GB	03

APPL-NO: 09/555839   [PALM]
DATE FILED: December 15, 1998

FOREIGN-APPL-PRIORITY-DATA:

COUNTRY	APPL-NO	APPL-DATE
EP	97310358	December 19, 1997
GB	9726934	December 19, 1997
EP	98304429	June 4, 1998
GB	9812060	June 4, 1998

PCT-DATA:

APPL-NO	DATE-FILED	PUB-NO	PUB-DATE	371-DATE
PCT/GB98/03755	December 15, 1998	WO99/33224	Jul 1, 1999	Jun 6, 2000

INT-CL-ISSUED:

TYPE	IPC	DATE	IPC-OLD
IPCP	H04L9/32	20060101	H04L009/32
IPCS	H04L9/00	20060101	H04L009/00
IPCS	H04N7/167	20060101	H04N007/167

INT-CL-CURRENT:

TYPE	IPC	DATE
CIPS	H04 L 9/00	20060101
CIPP	H04 L 9/32	20060101
CIPS	H04 N 7/167	20060101

US-CL-ISSUED: 713/192; 713/170, 713/171, 713/172, 713/173, 713/174, 380/239, 380/262
US-CL-CURRENT: 713/192; 380/239, 380/262, 713/170, 713/171, 713/172, 713/173, 713/174

FIELD-OF-CLASSIFICATION-SEARCH: 713/192, 713/170, 713/171, 713/172, 713/173, 713/174, 380/262, 380/239
See application file for complete search history.

PRIOR-ART-DISCLOSED:

U.S. PATENT DOCUMENTS

| Search Selected | Search ALL | Clear |

	PAT-NO	ISSUE-DATE	PATENTEE-NAME	US-CL
☐	5148485	September 1992	Dent	
☐	5301233	April 1994	Coutrot et al.	
☐	5467134	November 1995	Laney et al.	
☐	5483598	January 1996	Kaufman et al.	
☐	5544161	August 1996	Bigham et al.	370/397
☐	5584023	December 1996	Hsu	
☐	5652868	July 1997	Williams	
☐	5710815	January 1998	Ming et al.	
☐	5787179	July 1998	Ogawa et al.	
☐	5937067	August 1999	Thatcher et al.	
☐	6055314	April 2000	Spies et al.	380/228
☐	6222924	April 2001	Salomaki	
☐	6351538	February 2002	Uz	
☐	6580906	June 2003	Bilgic et al.	

FOREIGN PATENT DOCUMENTS

FOREIGN-PAT-NO	PUBN-DATE	COUNTRY	CLASS
0528730	August 1992	EP	
0534419	March 1993	EP	
WO 93/09627	May 1993	WO	
WO 97/26611	July 1997	WO	
WO 97/34426	September 1997	WO	

OTHER PUBLICATIONS

Popp et al, "Security Service for Telecommunications Users" Bringing

Telecommunication Services to the People--ISS & N 1995, Third International
Conference on Intelligence in Broadband Service and Networks, Heraklion, Crete,
Oct. 16-19, 1995. Proceedings, NO Conf. 3, Oct. 16, 1995, pp. 28-39, XP 000593466.
cited by other
Bottura, Charging and Tariffing Functions and Capabilities for Mans' Proceedings of
the Network Operations and Management Symposium (NOM, Memphis, Apr. 6-9, 1992, vol.
1, Jan. 1, 1992, pp. 208-218. cited by other
Coffey et al, Non-Repudiation with Mandatory Proof of Receipt: Computer
Communications Review, vol. 26, No. 1, Jan. 1, 1996, pp. 6-17, XP000580016. cited
by other

ART-UNIT: 2137

PRIMARY-EXAMINER: Smithers; Matthew

ASSISTANT-EXAMINER: Fields; Courtney

ATTY-AGENT-FIRM: Nixon & Vanderhye P.C.

ABSTRACT:

In a data communications system a remote data source outputs data as a series of
application data units (ADUs). Each ADU is individually encrypted with a different
key. The keys are transmitted (for example using Internet multicasting) via a
communications network to one or more customer terminals. At the terminals a
sequence of keys is generated for use in decrypting the ADUs. A record is kept of
the keys generated, and this record may subsequently be used to generate a receipt
for the data received by the customer. The keys may be generated, and the record
stored within a secure module such as a smartcard.

36 Claims, 9 Drawing figures

☐ ▓ Generate Collection ▓ | Print |

L3: Entry 2 of 13   File: PGPB   Dec 29, 2005

PGPUB-DOCUMENT-NUMBER: 20050286488
PGPUB-FILING-TYPE: new
DOCUMENT-IDENTIFIER: US 20050286488 A1

TITLE: Communications network

PUBLICATION-DATE: December 29, 2005

INVENTOR-INFORMATION:

NAME	CITY	STATE	COUNTRY
Briscoe, Robert J.	Suffolk		GB
Rizzo, Michael	Suffolk		GB

ASSIGNEE-INFORMATION:

NAME	CITY	STATE	COUNTRY	TYPE CODE
British Telecommunications public limited company	London		GB	03

APPL-NO: 11/216349   [PALM]
DATE FILED: September 1, 2005

RELATED-US-APPL-DATA:
Application 11/216349 is a division-of US application 09/674717, filed November 6, 2000, PENDING
Application 09/674717 is a a-371-of-international WO application PCT/GB99/01765, filed June 4, 1999, UNKNOWN

FOREIGN-APPL-PRIORITY-DATA:

COUNTRY	APPL-NO	DOC-ID	APPL-DATE
GB	9812161.9	1998GB-9812161.9	June 5, 1998
EP	98309609.0	1998EP-98309609.0	November 24, 1998
GB	9825723.1	1998GB-9825723.1	November 24, 1998
GB	9902052.1	1999GB-9902052.1	January 29, 1999
GB	9902648.6	1999GB-9902648.6	February 5, 1999

INT-CL-PUBLISHED: [07] H04 L 12/28

US-CL-PUBLISHED: 370/351
US-CL-CURRENT: 370/351

REPRESENTATIVE-FIGURES: 1

ABSTRACT:

In a communications network, which may be a federated network such as the Internet,

a tariff is distributed via the network to customer terminals. At each terminal a charge for use of the network is calculated by using the tariff. Different tariffs may be communicated for different services and a respective tariff may be varied depending upon the operational condition of the service. Different tariffs may be calculated for different customers and the tariffs may be varied in dependence upon the loading of network resources and different tariffs may have different volatilities. Part of the traffic from a user to the network may be sampled and the status of the user may be amended when a discrepancy is detected between the sampled parameters and the contracted parameters in the users contract.

L7: Entry 5 of 9   File: USPT   Feb 16, 1999

DOCUMENT-IDENTIFIER: US 5873083 A
TITLE: Method and apparatus for extending a relational database management system
using a federated coordinator

Detailed Description Text (12):
The federated coordinator 206 comprises a session management/plan generation module
236 which handles all aspects of primary sessions between clients 220 and the host.
The session plan/generation module 236 also accepts requests from clients 220, and
transforms them into execution plans which are executed by the RDBMS 210 and the
object servers 212, 214, and 216, performs database administration, establishes
sessions with the client 220 (including maintaining accounting information and
termination), and interprets client SQL or CLI requests and transforms them into
execution plans.

Detailed Description Text (16):
Internal messaging communications are provided through internal messaging data
paths between the federated coordinator 206, the virtual network 208, and the RDBMS
210, object server 212, and auxiliary object server 214. Since large object data
instances are not transmitted via these paths, they also need not offer high
bandwidth communications.

Detailed Description Text (62):
If the client command was a select command, object data associated with a MOL is
obtained from the object server 212, and provided to the requesting client 220 or
to a receiver client 258. First, the requested data is obtained 410 using the
answer set from the RDBMS 210, and if the client requests actual object data 412,
that data is sent 444 to the selected client via the virtual network 218. FIG. 4g
presents a flow chart illustrating the process of obtaining 410 an answer set
responsive to the select command, associating the resulting data with a MOL 410.
First, a query plan is formulated 434. The query plan is an optimized set of
commands which will be distributed to the RDBMS 210 and the object server 212 to
obtain the desired data. FIG. 4h describes how the query plan is formulated. First,
the M-SQL commands are parsed 512, resolved 514, checked to assure that access to
the indicated database is authorized 516, and optimized 518. Next, the optimized
plan is used to generate 520 the query plan. The process of parsing the query plan
is described in FIG. 4i. First, the federated coordinator 206 obtains schema,
network, and security information from the global data dictionary, which is stored
in the RDBMS 210. This information provides the federated coordinator 206 with the
building block information it needs to parse the M-SQL commands. Next, this
information is used to transform 524 the M-SQL commands into a parse tree of
objects, as described earlier. Items in the parse tree are then resolved 514. This
is accomplished as shown in FIG. 4j. Eventually the query plan must be optimized
according to a set of criteria established by the client 220 or other entities. To
perform this optimization, costs for the various alternative plans must be
obtained. These costs include both static and dynamic costs. Static costs are
obtained from the GDD 526. Derived costs depend on the execution path chosen, and
must be calculated 528 on the go. After the derived costs are calculated 528, they
are bound to the parse tree nodes 530, and by iteration, these parse tree nodes are
used to derive an optimized execution plan 532. This optimized plan is then used to
generate the query plan, which comprises RDBMS 210 SQL commands and M-Step

execution plans for the object server 212. This process is illustrated in FIG. 4k.

(51) International Patent Classification [6] : H04M 15/00, 3/00, H04L 12/14	A3	(11) International Publication Number: WO 98/02828
		(43) International Publication Date: 22 January 1998 (22.01.98)

(21) International Application Number: PCT/US97/12171

(22) International Filing Date: 11 July 1997 (11.07.97)

(30) Priority Data:
08/679,965   15 July 1996 (15.07.96)   US

(71) Applicant: BELLSOUTH CORPORATION [US/US]; 1155 Peachtree Street, N.E., Atlanta, GA 30309 (US).

(72) Inventor: RODEN, Barbara, J.; 704 E. Paces Ferry Road, Atlanta, GA 30305 (US).

(74) Agents: MEHRMAN, Michael, J. et al.; Jones & Askew, LLP, 37th floor, 191 Peachtree Street, N.E., Atlanta, GA 30303 (US).

(81) Designated States: AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GE, GH, HU, IL, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, UZ, VN, YU, ZW, ARIPO patent (GH, KE, LS, MW, SD, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG).

Published
With international search report.
Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.
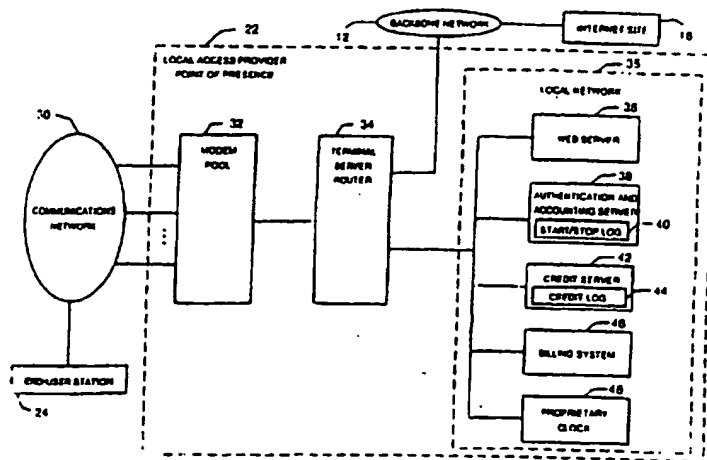
(88) Date of publication of the international search report:
5 March 1998 (05.03.98)

(54) Title: METHOD AND SYSTEM FOR ALLOCATING COSTS IN A DISTRIBUTED COMPUTING NETWORK

(57) Abstract

A method and system for providing an end-user with Internet access and allocating a cost associated with that access among the end-user and Internet sites (18) accessed by the end-user. A supervisory program module (58), such as a "JAVA" applet, resides on an originating station (24), such as a personal computer, operated by the end-user. The supervisory program module (58) may be activated by transmitting the supervisory program module to the originating station (24) from an Internet point of presence (22) operated by a local access provider. Alternatively, a trigger may be transmitted from the point of presence (22) to the originating station (24) to activate a supervisory program module (58) already residing on the originating station (24). The supervisory program module (58) monitors the duration of connections with specific Internet sites, and transmits messages to the point of presence (22) indicating the duration of these connections. The local access provider uses the information received in these messages to allocate a cost associated with the access, such as the cost associated with using a telephone network (30), among the end-user and Internet sites accessed by the end-user. Unique keys and time stamps are used as security measures. Unique keys are random identification numbers or codes generated by the point of presence (22). Time stamps are clock readings generated by the originating station, the point of presence, or other network components, are used as security measures.

INTERNATIONAL SEARCH REPORT

A. CLASSIFICATION OF SUBJECT MATTER
IPC 6   H04M15/00   H04M3/00   H04L12/14

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 6   H04M   H04L

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
P,X	WO 97 01920 A (FINLAND TELECOM OY ;IMMONEN PEKKA (FI)) 16 January 1997 see page 2, line 18 - page 3, line 27 see page 7, line 1 - line 25 see figure 3 ---	1,2,23
P,X	WO 96 37848 A (WALKER ASSET MANAGEMENT LTD) 28 November 1996 see page 2, line 13 - page 8, line 20 see page 10, line 18 - page 11, line 30 see page 13, line 1 - line 36 ---	1,2,23
P,X	EP 0 765 068 A (AT & T CORP) 26 March 1997 see column 1, line 55 - column 3, line 34 see column 5, line 58 - column 6, line 38 ---	1,2,23

-/--

[X] Further documents are listed in the continuation of box C   [X] Patent family members are listed in annex.

* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"&" document member of the same patent family

Date of the actual completion of the international search	Date of mailing of the international search report
9 January 1998	22/01/1998

| Name and mailing address of the ISA
European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016 | Authorized officer

Megalou, M |

Form PCT/ISA/210 (second sheet) (July 1992)

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category	Citation of document, with indication,where appropriate, of the relevant passages	Relevant to claim No
E	WO 97 29584 A (ERICSSON TELEFON AB L M ;MELEN BJOERN (FI); HYVOENEN MIKA (FI)) 14 August 1997 see abstract see figures 1-3	1,2,23
A	WO 95 23483 A (BRITISH TELECOMM ;COX RICHARD DEWITT (US); HUNTER ANDREW TIMOTHY () 31 August 1995 see page 66, line 22 - page 67, line 28	1-28
A	WO 95 33236 A (REISMAN RICHARD) 7 December 1995 see page 53, line 26 - page 55, line 1	1-28
P,A	DE 195 35 378 A (SEL ALCATEL AG) 27 March 1997 see the whole document	1-28
A	EP 0 192 071 A (SIEMENS AG) 27 August 1986 see abstract	1-28

2

INTERNATIONAL SEARCH REPORT

Information on patent family members

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
WO 9701920 A	16-01-97	FI 953208 A	29-12-96
WO 9637848 A	28-11-96	AU 5922996 A CA 2195968 A EP 0782728 A	11-12-96 28-11-96 09-07-97
EP 0765068 A	26-03-97	AU 6571896 A CA 2182818 A JP 9153964 A	27-03-97 23-03-97 10-06-97
WO 9729584 A	14-08-97	FI 960619 A AU 1726497 A	10-08-97 28-08-97
WO 9523483 A	31-08-95	AU 1817395 A CA 2183981 A EP 0748569 A JP 9509540 T	11-09-95 31-08-95 18-12-96 22-09-97
WO 9533236 A	07-12-95	US 5694546 A	02-12-97
DE 19535378 A	27-03-97	NONE	
EP 0192071 A	27-08-86	NONE	